




Disassembling Asus W2W-A1 Front Panel

Remove the front panel of the Asus W2W-A1 to gain access to the internals of the laptop.

Written By: Nolan Schock

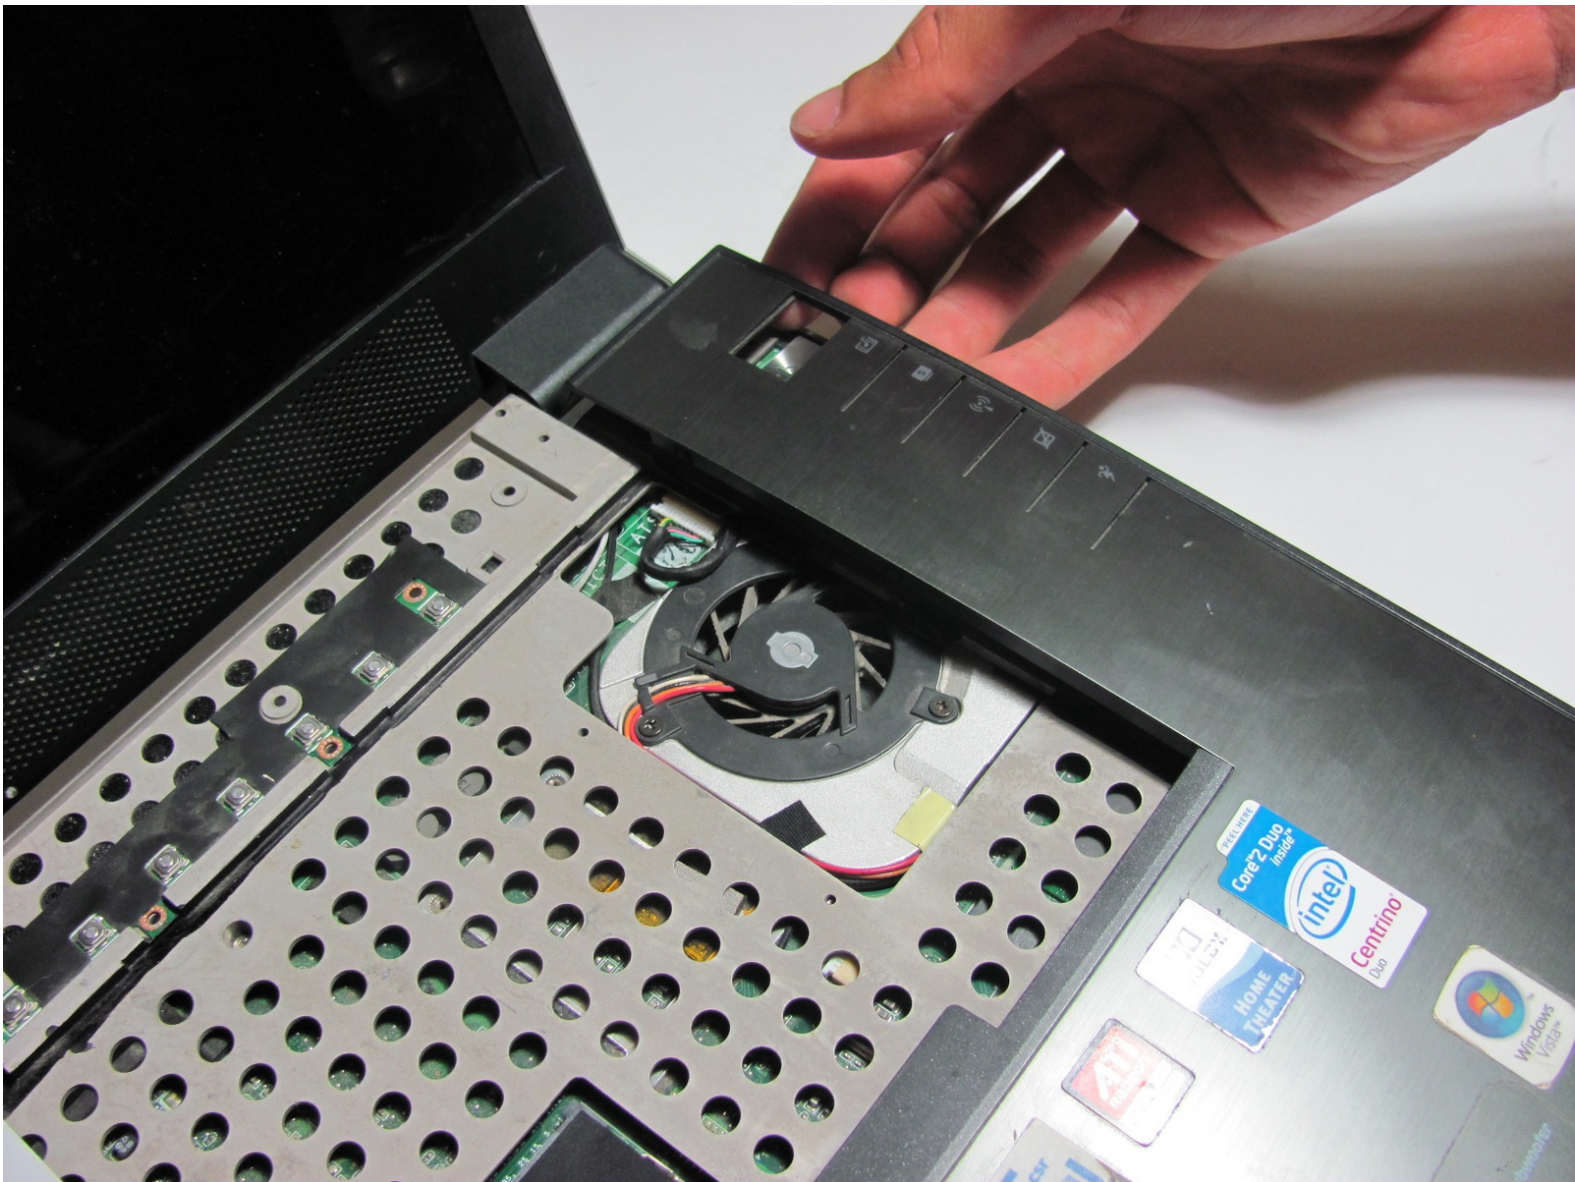



TOOLS:

- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-



- ## Step 2



- Page 3 of 5

Step 3



- Once the panel is removed, use the spudger to pry out the keyboard.

⚠ Do not fully remove, for the keyboard is still attached to the ribbon cable.

Step 4




- Detach the ribbon cable from the keyboard by pulling the end of the ribbon cable that is attached inside of the laptop.

⚠ Be sure to detach from the root rather than from near the middle. It should slide out with ease.

- Now you can fully remove the keyboard from the laptop.

Step 5 — Front Panel

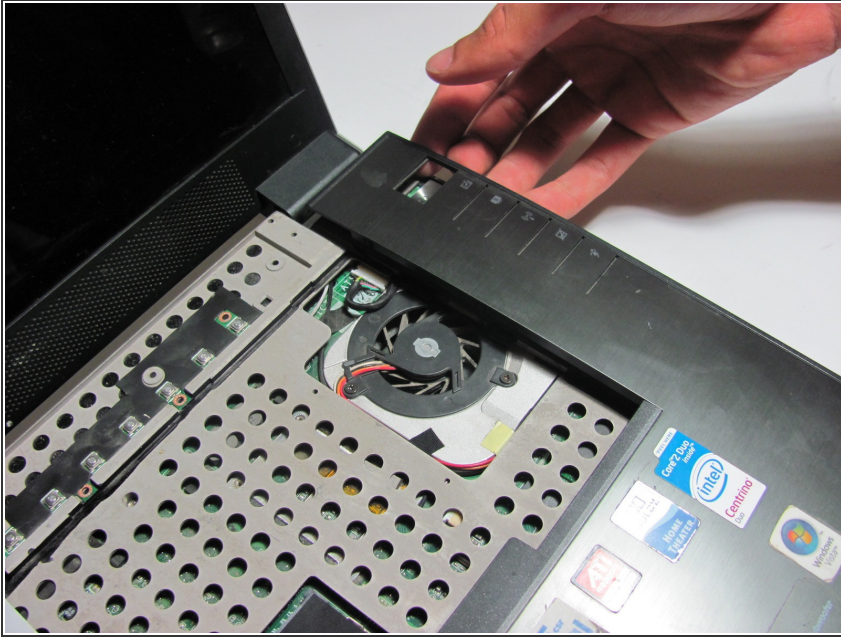

- Place your fingers or a spudger between the front panel and the rest of the laptop.
- Pull upwards gently to detach the side you are grabbing.
- Repeat on the other side until the panel easily peels off the laptop.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 10:20:53 AM.